

NOVOHALL

Rotary Sensor

Touchless

RFE-3200

CANopen

Mobile Applications



- Special Features
- Touchless hall technology
  - Electrical range 360°
  - 2 part design, mechanically decoupled
  - High protection class IP67, IP68, IP69K
  - Resolution 14 bit
  - Wear-free
  - Temperature range -40 °C to +105 °C
  - One and multi-channel versions
  - Optimized for use in mobile applications with highest EMC requirements such as ISO pulses and high interferences to ISO 11452, exceeds E1 requirements
  - Other configurations see separate data sheets

- Applications
- Mobile working machines (industrial trucks, construction machinery, agricultural and forestry machinery)
  - Marine applications

The 2 part design consisting of sensor and magnetic position marker offers great flexibility when mounting. The absence of shaft and bearing makes the assembly much less sensitive to axial and radial application tolerances - separate couplings are obsolete. Measurements can be made transmissively through any non-ferromagnetic material. The sensor is perfectly suitable for use in harsh environmental conditions through the completely encapsulated electronics.

Description	
Material	Housing: high grade, temperature resistant plastic PBT GF30 with SS inserts
Mounting	With 2 pan head screws M4x18 (included in delivery)
Fastening torque of mounting	max. 200 Ncm
Electrical connection	6-pin MQS-connector, code A, tinned contact according to drawing AMP-114-18063-126, Index A1 (Connector: AMP P/N 1-967616-1)
Mechanical Data	
Dimensions	See dimension drawing
Mechanical travel	continuous
Weight	approx. 50 g

Ordering Specifications

Ordering Specifications

Preferred types printed in bold

• Delivery time up to 25 pcs. within 10 working days EXW

• Best low-volume pricing

Interface

6: CANOpen

Interface parameters

Single-channel version

1: 1x position, 1x speed

5: 1x position, 1x speed with bus termination 120 Ω

Dual-channel version

2: 2x position, 2x speed

6: 2x position, 2x speed with bus termination 120 Ω

Baud rate

1: 1000 kBaud

2: 800 kBaud

3: 500 kBaud

4: 250 kBaud

5: 125 kBaud

7: 50 kBaud

Electrical connection

521: Connector AMP MQS 6-pin, male

RFE - 3201 - 214 - 614 - 521

Series

Mechanical version

3201: Standard design

Resolution

14: 14 bits


Interface

2: Digital Interface


Accessories included in delivery

- 2x Pan head screws M4x18

## Drawing

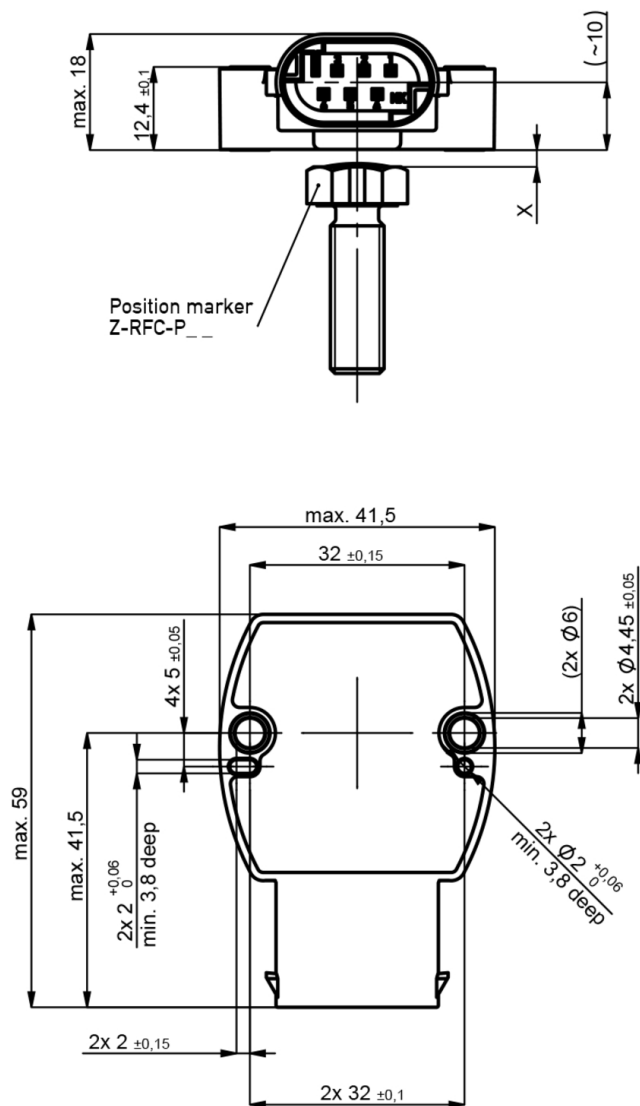

CAD data see  
[www.novotechnik.de/en/download/cad-data/](http://www.novotechnik.de/en/download/cad-data/)

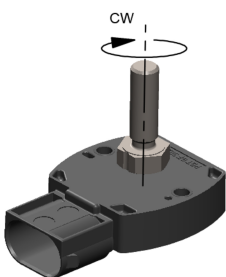

When the marking of the position marker points towards the connector, the sensor is near the electrical center position (index position).

## Technical Data




<b>Type</b>	<b>RFE-32_-214-6_-521</b> <b>CANopen</b>
Measured variables	Position and speed
Measuring range	360°
Measuring range speed	0 ... 1600 rpm
Number of channels	1 / 2
Protocol	CANopen protocol to CiA DS-301 V4.2.0, Device profile DS-406 V3.2 Encoder Class C2, LSS services to CiA DS-305 V1.1.2
Programmable parameters	Position, speed, cams, working areas, rotating direction, scale, offset, node ID, baud rate
Diagnosis	activated (in case of error, output signal is outside of the plausible signal range)
Node ID	1 ... 127 (default 127)
Baud rate	50 ... 1000 kBaud
Update rate	1 kHz
Resolution	14 bits
Resolution speed	$360^\circ/2^{14} \approx 0.022^\circ/\text{ms}$
Linearity	$\leq \pm 0.5\%$ FS
Repeatability	$\leq \pm 0.1^\circ$
Hysteresis	$\leq \pm 0.1^\circ$
Temperature error	$\pm 0.2\%$ FS
Supply voltage $U_b$	12/24 VDC (8 ... 34 VDC)
Current consumption at Power-on	$\leq 50$ mA
Power drain w/o load	$< 0.4$ W
Overvoltage protection	45 VDC (permanent)
Polarity protection	yes (supply lines)
Short circuit protection	yes (output vs. GND and supply voltage up to 40 VDC)
Insulation resistance (500 VDC)	$\geq 10$ M $\Omega$
Bus termination internal	120 $\Omega$ (optionally)
<b>Environmental Data</b>	
Max. operational speed	Mechanically unlimited
Vibration IEC 60068-2-6	20 g, 5 ... 2000 Hz, $A_{\text{max}} = 0.75$ mm
Shock IEC 60068-2-27	50 g, 6 ms
Protection class ISO 20653	IP67 / IP68 / IP69K
Operating temperature	-40 ... +105°C
Life	Mechanically unlimited
Functional safety	If you need assistance in using our products in safety-related systems, please contact us
MTTF (IEC 60050)	843 years (one-channel) or 819 years (two-channel, per channel)
Traceability	Serial number on type labeling: production batch of the sensor assembly and relevant sensor components
Conformity/Approval	CE, UKCA see <a href="https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk">https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk</a> WEEE see <a href="https://www.novotechnik.de/en/downloads/certificates/eu-directive-wEEE/">https://www.novotechnik.de/en/downloads/certificates/eu-directive-wEEE/</a>
<b>EMC Compatibility</b>	
ISO 10605 ESD (Handling/Component)	8 kV
ISO 11452-2 Radiated HF-fields	100 V/m
ISO 11452-5 Radiated HF-Fields, stripline	200 V/m
CISPR 25 Radiated emission	Level 3
ISO 7637-2 Transient Emissions	Level 3
ISO 7637-2 Pulses on supply lines	(1, 2a, 2b, 3a, 3b, 4, 5) Level 4
ISO 7637-3 Pulses on output lines	Level 4
ISO 16750 Pulses on supply lines	Starting profile Level 4 @12 V / Level 3 @24 V
Emission/Immunity	Exceeds E1 requirements

FS = Full scale: Signal span according to electrical measuring range

**Connection Assignment**

Signal	Connector code 5_ _
Supply voltage Ub	Pin 1
GND	Pin 2
CAN_H	Pin 3, pin 6
CAN_L	Pin 4, pin 5



Position Markers

**Z-RFC-P23**

Position marker for fixation with threaded pin M4 (included in delivery)  
Caution: For orientation of the output characteristic please follow the user manual of the position marker!

Material PA6-GF  
Max. permitted  $\pm 3$  mm  
radial offset  
Operating temp.  $-40 \dots +125^{\circ}\text{C}$

P/N	Pack. unit [pcs]
400056074	1
400056085	25

**Z-RFC-P43**

Position marker for fixation with threaded pin M4 (included in delivery)  
Caution: For orientation of the output characteristic please follow the user manual of the position marker!

Material PA6-GF  
Max. permitted  $\pm 3$  mm  
radial offset  
Operating temp.  $-40 \dots +125^{\circ}\text{C}$

P/N	Pack. unit [pcs]
400105041	1
400105042	25

**Z-RFC-P30**

Position marker for frontal fixation with 2 cylinder screws M3x8 (included in delivery).

Material PBT-GF  
Max. permitted  $\pm 1.5$  mm  
radial offset  
Operating temp.  $-40 \dots +125^{\circ}\text{C}$





P/N	Pack. unit [pcs]
400056086	1
400056087	25

**Z-RFC-P31**



Position marker for frontal fixation with 2 cylinder screws M3x8 (included in delivery).

Material PBT-GF  
Max. permitted  $\pm 3$  mm  
radial offset  
Operating temp.  $-40 \dots +125^{\circ}\text{C}$

P/N	Pack. unit [pcs]
400056088	1
400056089	25

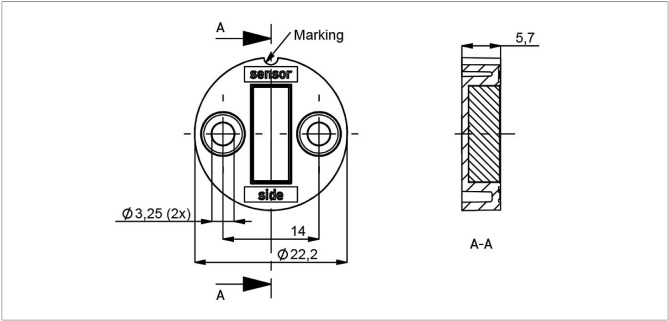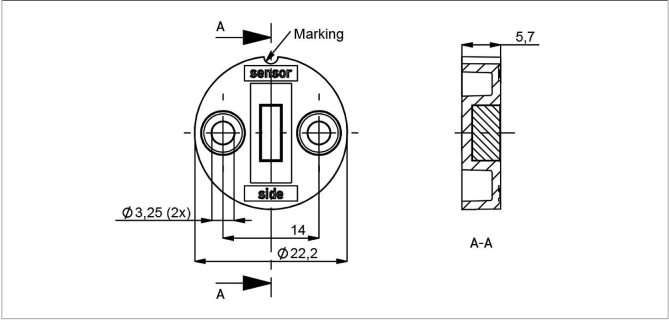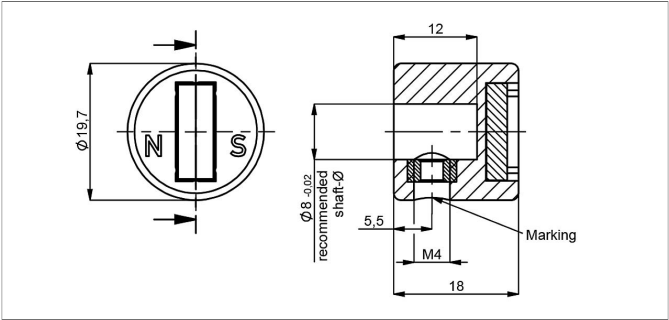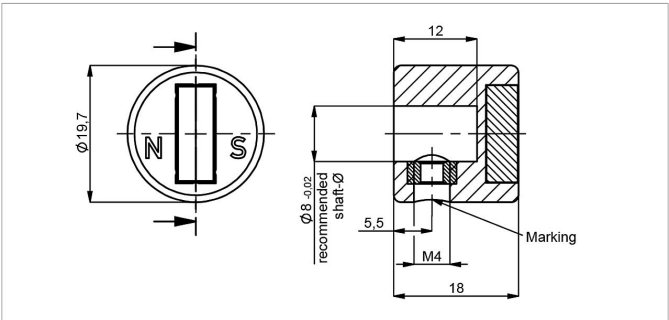


Position Markers

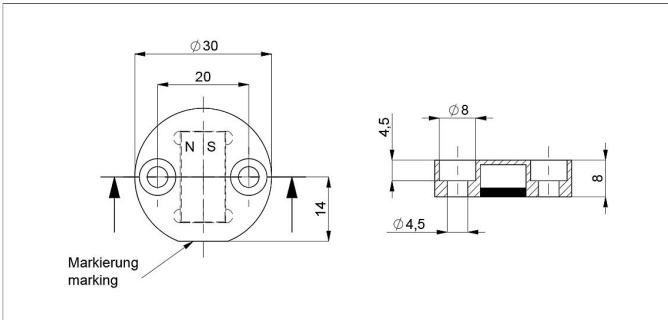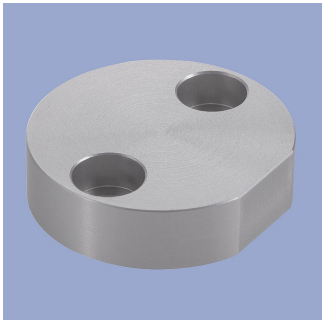


**Z-RFC-P22**  
Position marker for frontal fixation with 2 cylinder head screws M4x20 (with screw lock, included in delivery).  
Attention: Closed side of position marker faces the active side of sensor.

Material	Aluminium, anodized
Max. permitted radial offset	± 4 mm
Operating temp.	-40 ... +125°C
<b>P/N</b>	<b>Pack. unit [pcs]</b>
400106735	1
400106736	25

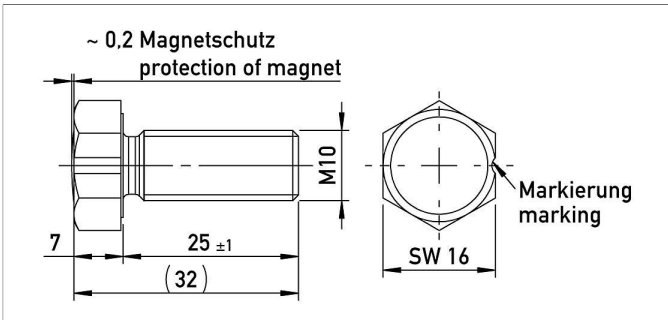


**Z-RFC-P18**  
Screw position marker M10 x 25 mm, similar DIN 933, magnet potted

Material	Aluminium, anodized
Max. permitted radial offset	± 3 mm
Operating temp.	-40 ... +125°C
<b>P/N</b>	<b>Pack. unit [pcs]</b>
400104756	1
400104757	25

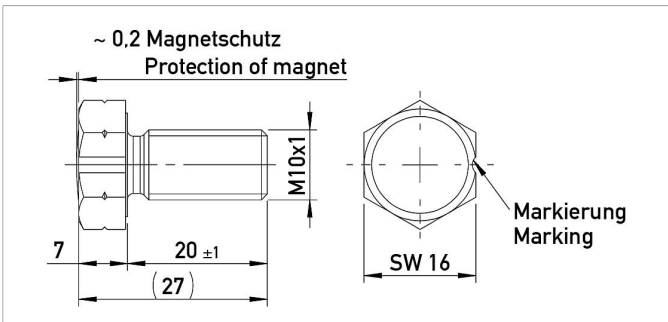

**Z-RFC-P28**  
Screw position marker M10x1 x 20 mm, similar DIN 933, magnet potted


Material	Aluminium, anodized
Max. permitted radial offset	± 3 mm
Operating temp.	-40 ... +125°C
<b>P/N</b>	<b>Pack. unit [pcs]</b>
400108462	1
400108463	25

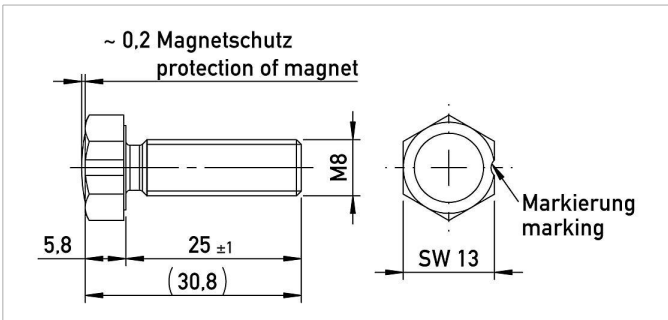

**Z-RFC-P19**  
Screw position marker M8 x 25 mm, similar DIN 933/ISO 4017, magnet potted

Material	Aluminium, anodized
Max. permitted radial offset	± 1.5 mm
Operating temp.	-40 ... +125°C
<b>P/N</b>	<b>Pack. unit [pcs]</b>
400104754	1
400104755	25

## Position Markers

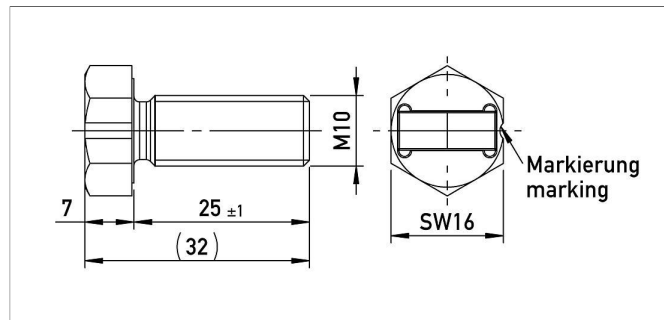

## Z-RFC-P20

Screw position marker M10 x 25 mm, similar  
DIN 933


Material	Aluminium, anodized
----------	---------------------

Max. permitted  $\pm 3$  mm

radial offset

Operating temp. -40 ... +125°C

P/N	Pack. unit [pcs]
400104758	1
400104759	25

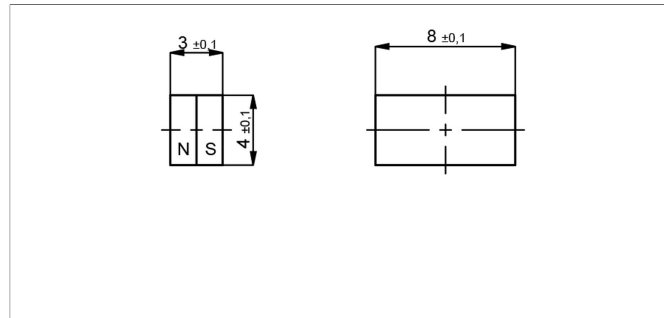

## Z-RFC-P03

Magnet for direct application onto customer's shaft (see user manual).


We recommend mounting on non-magnetizable materials, otherwise the specified working distances will vary (e.g. reduction of approx. 20% with axial mounting on a magnetizable shaft).

Max. permitted  $\pm 1.5$  mm

radial offset

Operating temp. -40 ... +125°C

P/N	Pack. unit [pcs]
400005658	1
400056081	50

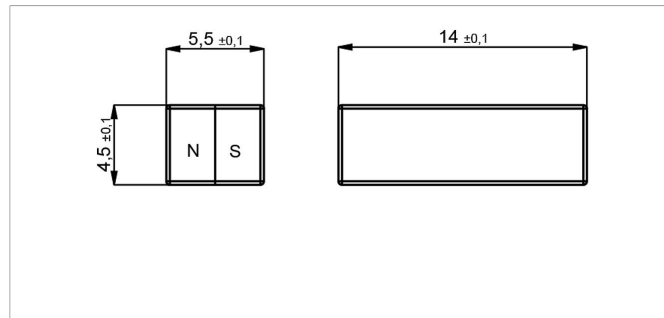

## Z-RFC-P04

Magnet for direct application onto customer's shaft (see user manual).

We recommend mounting on non-magnetizable materials, otherwise the specified working distances will vary (e.g. reduction of approx. 20% with axial mounting on a magnetizable shaft).

Max. permitted  $\pm 3$  mm

radial offset

Operating temp. -40 ... +125°C

P/N	Pack. unit [pcs]
400005659	1
400056082	50



## Position Markers


Working Distances Position Markers [mm] - Single-channel Versions

Z-RFC-P03	Z-RFC-P04	Z-RFC-P18 / P28	Z-RFC-P19	Z-RFC-P20	Z-RFC-P22	Z-RFC-P23	Z-RFC-P30	Z-RFC-P31	Z-RFC-P43
0.4 ... 1.9	2 ... 4.7	0 ... 4	0 ... 1.8	2 ... 4.7	4.1 ... 8.9	2 ... 4.7	0.4 ... 1.9	2 ... 4.7	0 ... 2.4

Working Distances Position Markers [mm] - Redundant Versions

Z-RFC-P03	Z-RFC-P04	Z-RFC-P18 / P28	Z-RFC-P19	Z-RFC-P20	Z-RFC-P22	Z-RFC-P23	Z-RFC-P30	Z-RFC-P31	Z-RFC-P43
0 ... 1.5	1.6 ... 4.2	0 ... 3.5	0 ... 1.3	1.6 ... 4.2	3.6 ... 8.4	1.6 ... 4.2	0 ... 1.5	1.6 ... 4.2	0 ... 2

Lateral Magnet Offset

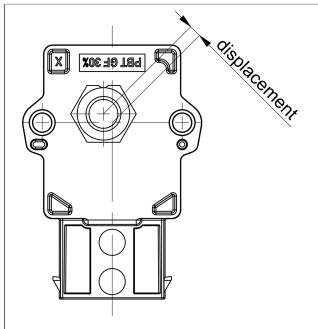

Lateral magnet offset will cause additional linearity error. The angle error, which is caused by radial displacement of sensor and position marker depends on the used position marker or magnet.





Additional Linearity Error at Radial Displacement - Single-channel Versions

Z-RFC-P02 / P04 / P08 Z-RFC-P20 / P23 / P31	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30	Z-RFC-P18 / P28	Z-RFC-P19	Z-RFC-P22
0.5 mm: $\pm 0.4^\circ$	0.5 mm: $\pm 0.4^\circ$	0.5 mm: $\pm 1.4^\circ$	0.5 mm: $\pm 0.7^\circ$	0.5 mm: $\pm 1.3^\circ$	1.0 mm: $\pm 0.8^\circ$
1.0 mm: $\pm 1.1^\circ$	1.0 mm: $\pm 1.1^\circ$	1.0 mm: $\pm 3.7^\circ$	1.0 mm: $\pm 1.3^\circ$	1.0 mm: $\pm 2.6^\circ$	2.0 mm: $\pm 1.8^\circ$
2.0 mm: $\pm 3.5^\circ$	2.0 mm: $\pm 3.5^\circ$	2.0 mm: -	2.0 mm: $\pm 3.3^\circ$	2.0 mm: -	4.0 mm: $\pm 5.4^\circ$

Additional Linearity Error at Radial Displacement - Redundant Versions

Z-RFC-P02 / P04 / P08 Z-RFC-P20 / P23 / P31	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30	Z-RFC-P18 / P28	Z-RFC-P19	Z-RFC-P22
0.5 mm: $\pm 0.7^\circ$	0.5 mm: $\pm 0.7^\circ$	0.5 mm: $\pm 2.5^\circ$	0.5 mm: $\pm 1.1^\circ$	0.5 mm: $\pm 2.3^\circ$	1.0 mm: $\pm 1.1^\circ$
1.0 mm: $\pm 1.8^\circ$	1.0 mm: $\pm 1.8^\circ$	1.0 mm: $\pm 6.4^\circ$	1.0 mm: $\pm 2^\circ$	1.0 mm: $\pm 4.5^\circ$	2.0 mm: $\pm 2.4^\circ$
2.0 mm: $\pm 5.2^\circ$	2.0 mm: $\pm 5.2^\circ$	2.0 mm: -	2.0 mm: $\pm 4.6^\circ$	2.0 mm: -	4.0 mm: $\pm 6.7^\circ$

## Connector System MQS

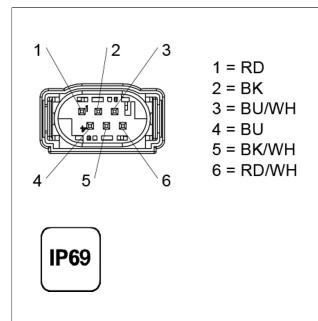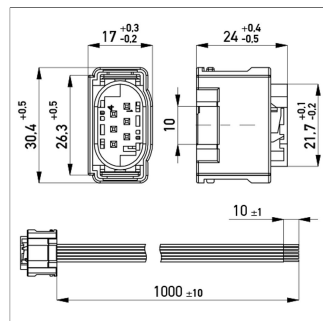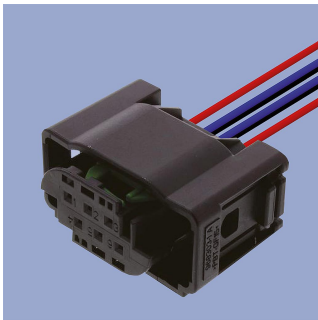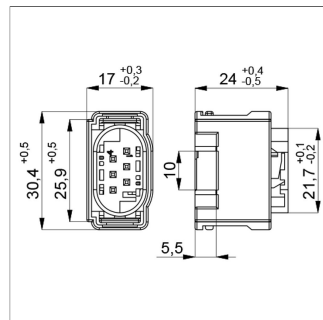

## EEM-33-34

Connector kit MQS System including

- 1 plug socket (female), PBT GF15, AMP P/N 1-967616-1
- 6 tinned contacts for cable cross-section area 0.25 ... 0.35 mm<sup>2</sup> (AWG 22), AMP-P/N 963727-1 or 5-962885-1
- 6 single conductor sealings AMP P/N 967067-2

Operating temp. -40 ... +120°C

P/N	Type
400005666	EEM-33-34

EEM-33-24

Connector MQS AMP P/N 1-967616-1, 6-pin,  
PBT GF15, with lead wires 0.5 mm<sup>2</sup>, PVC, 1 m,  
open ended

Operating temp. -40 ... +120°C

Lead wires      PVC, 6x0.5 mm<sup>2</sup>

P/N	Type	Length
400108029	EEM-33-24	1 m

Novotechnik U.S., Inc.  
155 Northboro Road

Southborough, MA 01772  
Phone 508 485 2244  
Fax 508 485 2430  
info@novotechnik.com  
www.novotechnik.com



© Oct 10, 2024

The specifications contained in our datasheets are intended solely for informational purposes. The documented specification values are based on ideal operational and environmental conditions and can vary significantly depending on the actual customer application. Using our products at or close to one or more of the specified performance ranges can lead to limitations regarding other performance parameters. It is therefore necessary that the end user verifies relevant performance parameters in the intended application. We reserve the right to change product specifications without notice.