
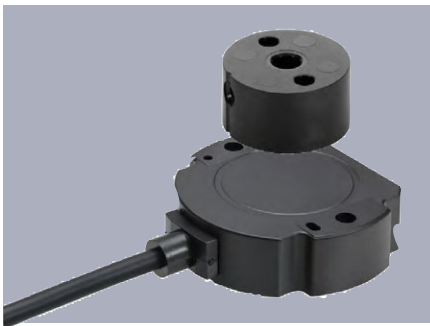


**NOVOHALL  
Rotary Sensor  
touchless  
transmissive**

**Series RFC4800  
digital  
SSI, SPI, Incremental**

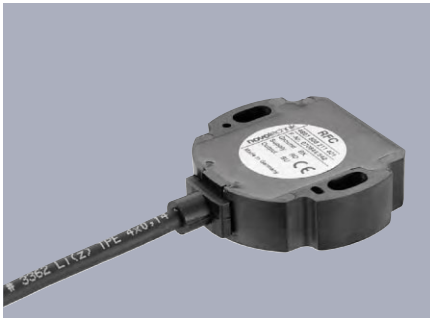

The sensor utilizes the orientation of a magnetic field for the determination of the actual position. Therefore, a magnet is attached to the rotating shaft. The magnetic field orientation is captured with an integrated circuit.


The digital output represents the calculated position. The generation of the position data works almost in real time.

The housing is made of high grade temperature-resistant plastic material. The fixings allow for simple mounting. The sensor is fully sealed and therefore is not sensitive to dust, dirt or moisture.

The two-part design of the sensor Series RFC and its position marker offers the user maximal variability when mounting the sensor. The absence of shaft and bearing makes the assembly insensitive against application tolerances and disburdens from using coupling devices.

Measurements can be made also transmissively through various (non-magnetic) materials such as plastic or aluminium.

|                        |   |
|------------------------|---|
| Description            |   |
| Housing                | high grade, temperature resistant plastic   |
| Electrical connections | shielded cable AWG 24 (0.25 mm <sup>2</sup> ) SSI, INC<br>shielded cable AWG 26 (0.14 mm <sup>2</sup> ) SPI |


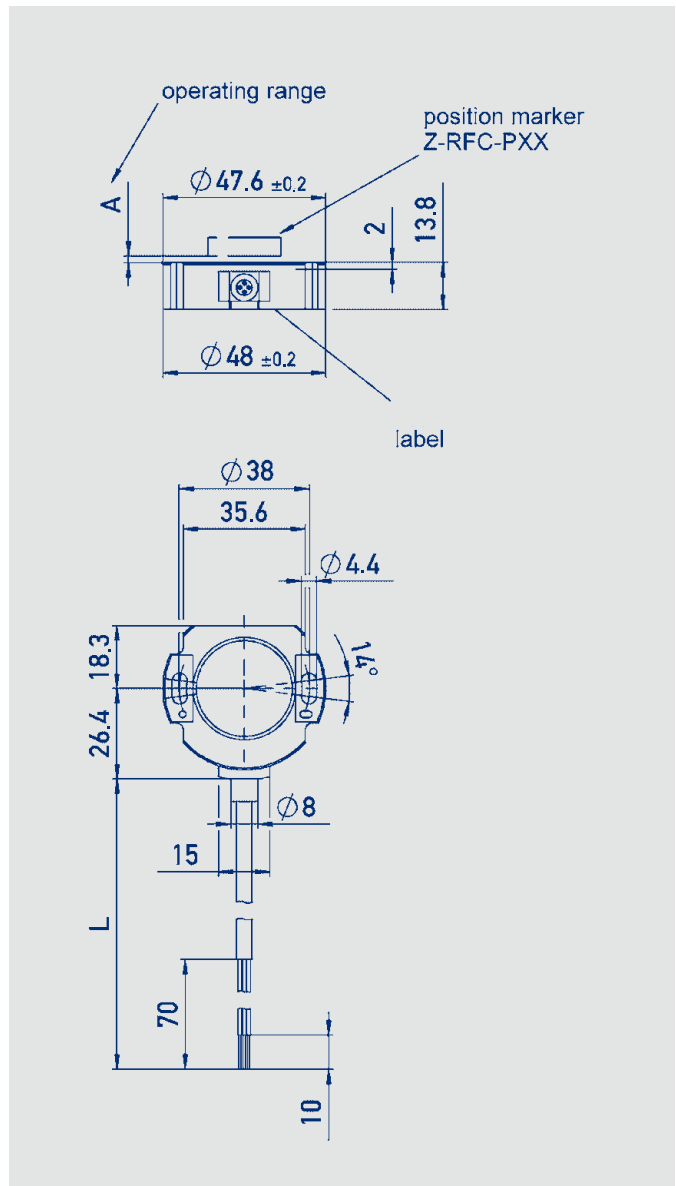


**Special features**

- touchless, magnetic
- enables transmissive measurement
- SSI, SPI and incremental output
- extremely fast measurement
- measuring range 360°
- simple mounting
- lateral magnet offset up to ±1 mm
- protection class IP67 / IP69K
- unlimited mechanical life
- resolution 9 - 14 bit
- linearity <±0.5%


Versions with analogue interfaces see separate data sheet

## Incremental Interface

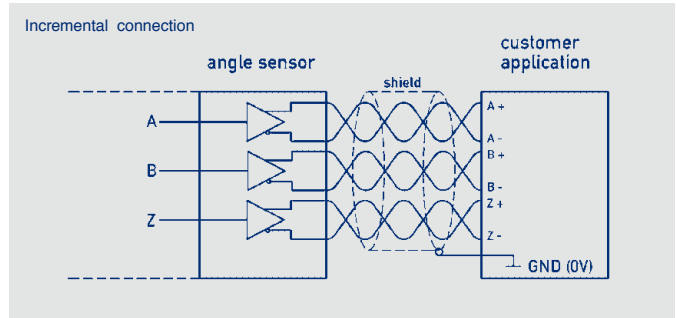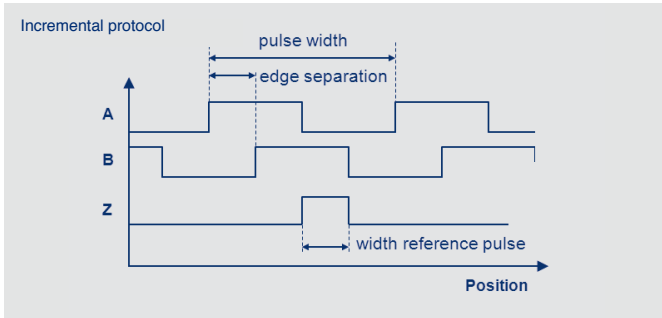



### Connections Incremental

| Signal             | Wire colour |
|--------------------|-------------|
| Supply voltage Ub  | Green       |
| Supply voltage GND | Brown       |
| A+                 | Yellow      |
| A-                 | Grey        |
| B+                 | Red         |
| B-                 | Pink        |
| Z+                 | White       |
| Z-                 | Blue        |




When the marking of the position marker is opposite to the cable outlet, the sensor is located at the reference pulse (Z)

## SSI Interface

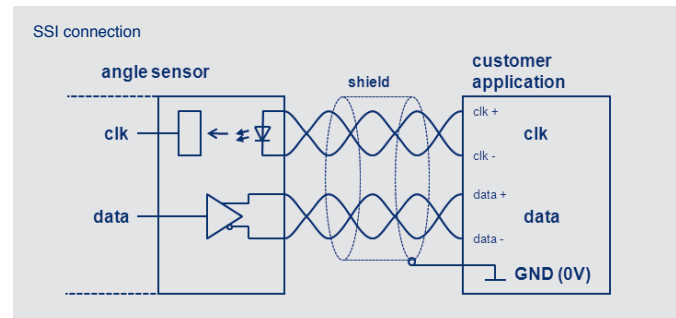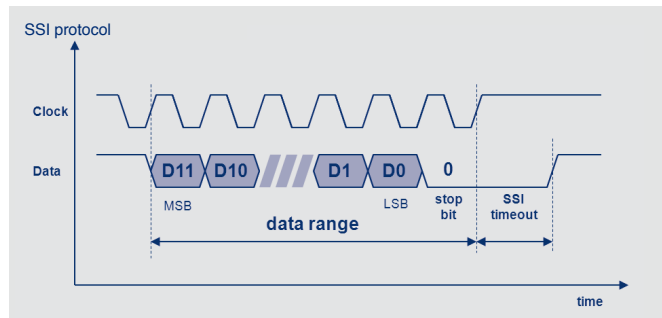



### Connections SSI

| Signal                  | Wire colour |
|-------------------------|-------------|
| Supply voltage Ub       | Green       |
| Supply voltage GND      | Brown       |
| Signal output SSI Data+ | Red         |
| Signal output SSI Data- | Yellow      |
| Clock input SSI Clk+    | Pink        |
| Clock input SSI Clk-    | Blue        |
| Not assigned            | White       |
| Not assigned            | Grey        |




When the marking of the position marker points to the cable outlet, the sensor is located in the electrical center position.

## SPI Interface

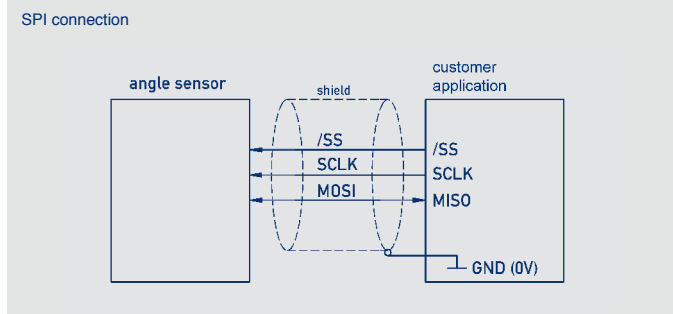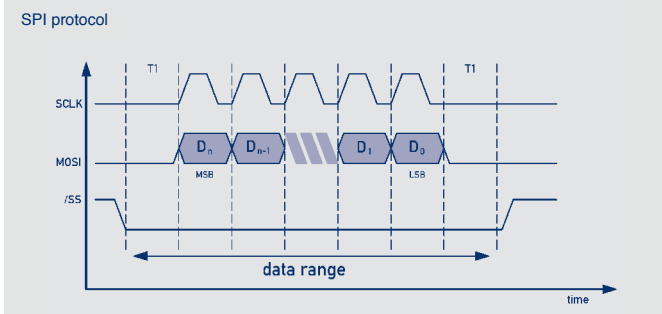



### Connections SPI

| Signal               | Wire colour |
|----------------------|-------------|
| Supply voltage $U_b$ | Green       |
| Supply voltage GND   | Brown       |
| MOSI / MISO          | Yellow      |
| SCLK                 | Grey        |
| /SS (slave select)   | White       |



When the marking of the position marker points to the cable outlet, the sensor is located in the electrical center position.

## Position marker (examples)

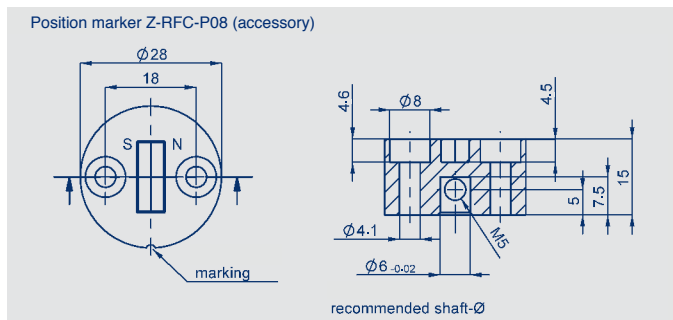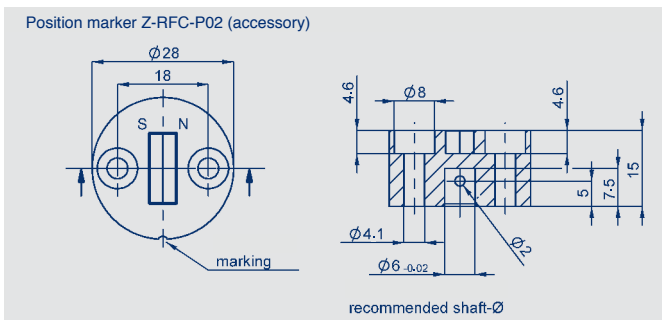

### Operating range position marker SSI / INC

|                                      |              |
|--------------------------------------|--------------|
| Z-RFC-P02 / ...P04 / ...P08 / ...P23 | 0 ... 1.5 mm |
|--------------------------------------|--------------|

Operating range position marker SPI  
see separate data sheet "Positionmarker rotary"

Further position markers please refer to separate data sheet.

Only Novotechnik approved magnets may be used!



## Technical Data Incremental Interface

|  | RFC-48_-2_-5_-_-_-   |                  |
|--|--|------------------|
|  | Supply voltage 5 VDC   |                  |
| <b>Mechanical Data</b>                                   |  |                  |
| Dimensions   | see dimension drawing  |                  |
| Mounting   | with 2 screws M4 (enclosed in delivery)  |                  |
| Mechanical travel  | 360 continuous   | °                |
| Maximum operational speed                                | 30000, higher speed on request   | min <sup>1</sup> |
| Weight   | ca. 50   | g                |
| <b>Electrical Data</b>                                   |  |                  |
| Supply voltage U <sub>b</sub>                            | 5 (4.5 ... 5.5)  | VDC              |
| Current consumption (w/o load)                           | typ. 20  | mA               |
| Reverse voltage  | yes, supply lines and outputs  |                  |
| Short circuit protection                                 | yes (vs. GND and U <sub>b</sub> )  |                  |
| Measuring range  | 360  | °                |
| Outputs  | A+ / A-<br>B+ / B-<br>Z+ / Z-  |                  |
| Length Z-pulse   | = distance between 2 edges A / B   |                  |
| Ohmic load at outputs                                    | > 1,2 per channel A / B / Z  | kΩ               |
| Update Rate intern                                       | 500 typ.   | ns               |
| Resolution across 360°                                   | 12 (11 / 10 / 9)   | Bit              |
| Repeatability  | 0.1  | °                |
| Hysteresis   | standard 0.7   | °                |
| Independent linearität                                   | typ. 0.5   | ± % FS           |
| Temperature error  | ±0.375   | % FS             |
| Insulation resistance (500 VDC)                          | ≥ 10   | MΩ               |
| Cross-section cable                                      | AWG 24, 0.25   | mm <sup>2</sup>  |
| <b>Environmental Data</b>                                |  |                  |
| Temperature range  | -40...+85  | °C               |
| Vibration IEC 60068-2-6                                  | 5...2000<br>Amax = 0.75<br>amax = 20   | Hz<br>mm<br>g    |
| Shock IEC 60068-2-27                                     | 100 (6 ms)   | g                |
| Life   | mechanical unlimited   |                  |
| MTTF (DIN EN IO 13849-1<br>parts count method, w/o load) | 246  | years            |
| Functional safety  | When using our products in safety-related systems<br>please contact us   |                  |
| Protection class ( DIN 40050 / IEC 529                   | IP67 / IP6k9k  |                  |
| EMC compatibility  | EN 61000-4-2 electrostatic discharges (ESD) 4kV, 8kV<br>EN 61000-4-3 electromagnetic fields 10V/m<br>EN 61000-4-4 electrical fast transients (Burst) 1kV<br>EN 61000-4-6 conducted disturbances, induced by RF fields 10V/m eff.<br>EN 55011/EN 55022/A1 Radiated disturbances class B |                  |

## Technical Data SPI Interface

|   |   |                 |
|---|---|-----------------|
|   | RFC-48_-2_-8_-_-_-_-_-  |                 |
|   | Supply voltage 5 VDC  |                 |
| <b>Mechanical Data</b>                                    |   |                 |
| Dimensions  | see dimension drawing   |                 |
| Mounting  | with 2 screws M4 (enclosed in delivery)   |                 |
| Mechanical travel   | 360 continuous  | °               |
| Weight  | ca. 50  | g               |
| <b>Electrical Data</b>                                    |   |                 |
| Supply voltage $U_b$                                      | 5 (4.5 ... 5.5)   | VDC             |
| Current consumption (w/o load)                            | typ. 15   | mA              |
| Reverse voltage   | yes, supply lines   |                 |
| Short circuit protection                                  | yes (vs. GND and $U_b$ )  |                 |
| Measuring range   | 360   | °               |
| Max. Clock rate   | 400   | kHz             |
| Level SCLK, MOSI, /SS                                     | TTL level (see application note SPI protocol)   |                 |
| Protocol  | SPI   |                 |
| Update Rate   | 1   | kHz             |
| Resolution across 360°                                    | 14  | Bit             |
| Repeatability   | 0.1   | °               |
| Hysteresis  | < 0.1   | °               |
| Independent linearity                                     | ≤ 0.5   | ± % FS          |
| Temperature error   | ±0.625  | % FS            |
| Insulation resistance (500 VDC)                           | ≥ 10  | MΩ              |
| Cross-section cable                                       | AWG 26, 0.14  | mm <sup>2</sup> |
| <b>Environmental Data</b>                                 |   |                 |
| Temperature range   | -40...+85   | °C              |
| Vibration IEC 60068-2-6                                   | 5...2000<br>Amax = 0.75<br>amax = 20  | Hz<br>mm<br>g   |
| Shock IEC 60068-2-27                                      | 100 (6 ms)  | g               |
| Life  | mechanical unlimited  |                 |
| MTTF (DIN EN ISO 13849-1<br>parts count method, w/o load) | 272   | years           |
| Functional safety   | When using our products in safety-related systems<br>please contact us  |                 |
| Protection class (DIN 40050 / IEC 529)                    | IP67 / IP6k9k   |                 |
| EMC compatibility   | EN 61000-4-2 electrostatic discharges (ESD) 4kV, 8kV<br>EN 61000-4-3 electromagnetic fields 10V/m<br>EN 61000-4-4 electrical fast transients (Burst) 1kV<br>EN 61000-4-6 conducted disturbances, induced by RF fields 10V/m eff.<br>EN 61000-4-8 Power frequency magnetic fields 3A/m<br>EN 55011/EN 55022/A1 Radiated disturbances class B |                 |

## Ordering specifications

Preferred types printed in bold:

- delivery time up to 25 pcs. within 10 working days
- no low volume surcharge

### Interface

- 4: Synchronous-Serial Interface (SSI)
- 5: Incremental Interface A / B / Z
- 8: SPI Interface

#### Interface parameter for SSI Interface (4 \_ \_)

- 11: 5 V /4.5 ... 5.5 V), output RS422 comp., Gray code, rising cw
- 12: 5 V (4.5 ... 5.5 V), output RS422 komp., Gray code, rising ccw

#### Interface parameter for Incremental Interface (5 \_ \_)

- 10: 5 V (4.5 ... 5.5 V), output RS422 comp., rising cw  
High Side and Low Side outputs on request  
UVW signals instead of ABZ signals for motor commutation on request

#### Interface parameter for SPI Interface (8 \_ \_)

- 31: 5 V (4.5 ... 5.5 V), Binary code, rising cw

#### Electrical connection

- 302: Round cable 5-pol. 1 m (0,14mm<sup>2</sup>; shielded) SPI
- 432: Round cable 8-pol. 1 m (0,25 mm<sup>2</sup>, shielded, SSI, Inc.  
Cable versions and assembled connectors on request.

**R F C** - **4 8 0 1** - **2 1 2** - **4 1 1** - **4 3 2**

Series

Mechanical version

- 4801: Elongated hole for fixation and easy adjustment
- 4802: Round hole mounting on request

#### Resolution (SSI Interface)

- 12: 12 bit - 4096 increments
- Other resolutions on request.

#### Resolution (Incremental Interface)

- 12: 1024 ppr - 4096 increments resolution (at 4-fold interpolation)
- 11: 512 ppr - 2048 increments resolution (at 4-fold interpolation)
- 10: 256 ppr - 1024 increments resolution (at 4-fold interpolation)
- 9: 128 ppr - 512 increments resolution (at 4-fold interpolation)
- Other resolutions on request.

#### Resolution (SPI Interface)

- 14: SPI 14 bit

Model

- 2: Digital Interface

### Necessary accessories

Position marker Z-RFC-P02,  
P/N 005661.

(Information on further position  
markers, working distances  
and lateral magnet offset see  
separate data sheet  
Positionmarker\_Rotary)

### Available on request

- Driver configurations for  
120 Ohm load
- Absolute position via  
incremental interface at power  
on (Power on Burst)