

**NOVOHALL  
Rotary Sensor  
Non-contacting**

**RSC-2800  
Ratiometric  
Industrial**



**Special Features**

- Non-contacting, magnetic technology
- Measuring range up to 360°
- Available with push-on coupling or marked shaft
- Simple mounting
- Protection class IP54, IP65, IP67
- Long life
- Very small hysteresis
- High resolution 12 bits
- Linearity < ±0.5 %
- One and multi-channel versions
- Other configurations see separate data sheets

**Applications**

- Manufacturing Engineering (textile machinery, packaging machinery, sheet metal and wire machinery)
- Automation technology
- Medical Engineering

The RSC-2800 sensor utilizes a contactless magnetic measurement technology to determine the measured angle. Unlike conventional Hall sensors, the orientation of the magnetic field is measured. The position information corresponding to the angular position is transmitted via a variety of analog and digital interfaces (see separate data sheets).

The housing is made of a special high grade temperature-resistant plastic material. Elongated slots allow simplicity in mounting together with ease of mechanical adjustment.

Three shaft options are available, including a push-on coupling option that ensures fast and simple installation.

**Description**

Material	Housing: high grade, temperature resistant plastic PPS-GF40/SF50 Shaft: SS X8CrNiS18-9 1.4305 / AISI 303
Mounting	With 2 screws M4 and washers
Max. fastening torque of mounting screws	max. 180 Ncm
Bearing	Sintered bronze bushing
Electrical connection	Cable 4x 0.5 mm <sup>2</sup> (AWG 20), TPE, shielded / Connector M12x1, A-coded with cable L = 0.15 m

**Mechanical Data**

Dimensions	See dimension drawing
Mechanical travel	continuous
Permitted shaft load static or dynamic	20 N (axial / radial)
Torque	0.15 Ncm (IP54), 0.5 Ncm (IP65), 1.0 Ncm (IP67)
Weight	approx. 50 g

Ordering Specifications

Ordering Specifications

Preferred types printed in bold

- Delivery time up to 25 pcs. within 10 working days EXW
- Best low-volume pricing

Supply voltage Ub

2: Ub = 5 VDC

Interface parameters

- 1: 5 ... 95% ratiometric to supply voltage Ub (0.25 ... 4.75 VDC)  
2: 10 ... 90% ratiometric to supply voltage Ub (0.5 ... 4.5 VDC)

Output characteristic

- 1: Rising characteristic cw  
2: Rising characteristic ccw  
3: Crossed outputs, channel 1 rising cw (partly redundant)  
Other output characteristics on request

Electrical connection

- 201: Cable, 4-pole, shielded, L = 0.5 m  
202: Cable, 4-pole, shielded, L = 1 m  
206: Cable, 4-pole, shielded, L = 3 m  
210: Cable, 4-pole, shielded, L = 5 m  
220: Cable, 4-pole, shielded, L = 10 m  
501: Conector M12x1, 4-pin, with cable, shielded, L = 0.15 m  
Cable versions and assembled connectors on request

R S C - 2 8 3 2 - 6 3 6 - 2 1 1 - 2 0 2

Series

Measuring range

- 03: Angle 0° ... 30° min.  
...  
06, 12, 18, 24, 36  
...  
36: Angle 0° ... 360° max.  
Other angles on request

Number of channels



- 6: One-channel version (1x supply voltage Ub, 1x output)  
7: Partly redundant version (1x supply voltage Ub, 2x output)

Mechanical version

- 2801: 6 mm shaft with marking, IP54\*  
2831: 6 mm shaft with marking, IP65\*  
2861: 6 mm shaft with marking, IP67\*  
2802: 6 mm shaft with flattening, IP54  
2832: 6 mm shaft with flattening, IP65  
2862: 6 mm shaft with flattening, IP67  
2821: push-on coupling, IP54  
2841: push-on coupling, IP65  
2871: push-on coupling, IP67  
Other shaft configurations on request  
\* Not recommended for new designs

## Drawing

CAD data see  
[www.novotechnik.de/en/download/cad-data/](http://www.novotechnik.de/en/download/cad-data/)

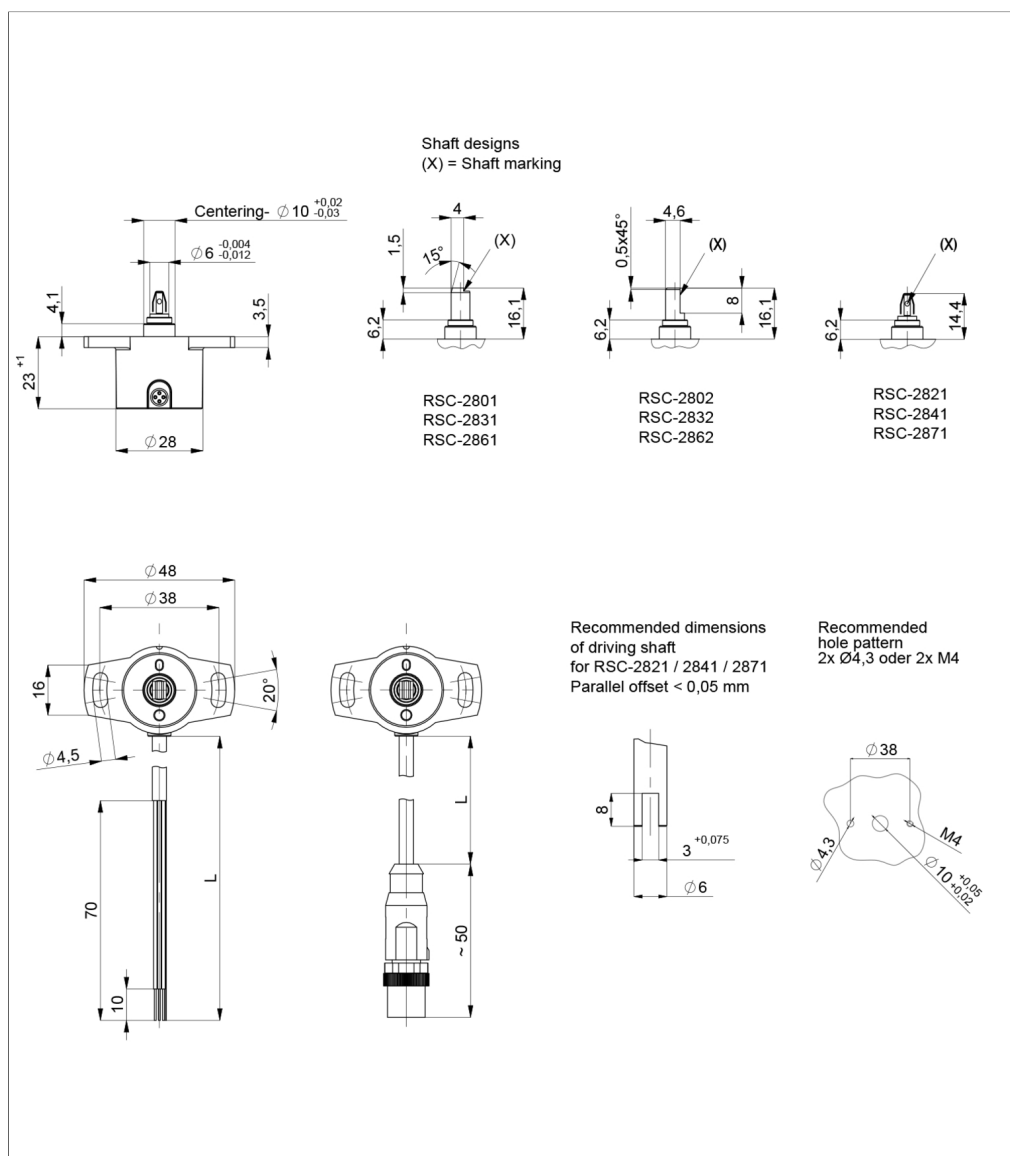

When the marking of the  
shaft is pointing towards  
the electrical outlet,  
the sensor output is near  
the electrical center  
position.


## Technical Data

<b>Type</b>	<b>RSC-28 _ _ _ _ -2 _ _ _ _</b>
Output signal	ratiometric to supply voltage $U_b$ 5 ... 95% (0.25 ... 4.75 V) 10 ... 90% (0.5 ... 4.5 V)
Load	$\geq 1 \text{ k}\Omega$
Number of channels	1 / 2
Update rate	typ. 5 kHz
Measuring range	0 ... 30° up to 0 ... 360° in 10°-steps
Independent linearity	$\leq \pm 0.5 \text{ \%FS}$
Resolution	12 bits
Repeatability	$\leq \pm 0.1^\circ$
Hysteresis	$\leq \pm 0.1^\circ$
Temperature error	Measuring range 30 ... 170°: typ. $\pm 0.625 \text{ \%FS}$ , Measuring range $\geq 180^\circ$ : typ. $\pm 0.31 \text{ \%FS}$
Supply voltage $U_b$	5 VDC (4.5 ... 5.5 VDC)
Current consumption w/o load	typ. 15 mA (typ. 8 mA on request)
Polarity protection	yes (supply lines)
Short circuit protection	yes (vs. GND and supply voltage)
Insulation resistance (500 VDC)	$\geq 10 \text{ M}\Omega$
<b>Environmental Data</b>	
Max. operational speed	800 rpm
Vibration IEC 60068-2-6	20 g, 5 ... 2000 Hz, $A_{\text{max}} = 0.75 \text{ mm}$
Shock IEC 60068-2-27	50 g, 6 ms
Protection class DIN EN 60529	IP54 / IP65 / IP67
Operating temperature	-40 ... +85°C -25 ... +85°C (connector M12)
Life	> 50 Mio. movements (mechanically)
Functional safety	If you need assistance in using our products in safety-related systems, please contact us
MTTF (IEC 60050)	4166 years (one-channel) or 4005 years (partly redundant, per channel)
<b>EMC Compatibility</b>	
EN 61000-4-2 ESD (contact/air discharge)	4 kV, 8 kV
EN 61000-4-3 Electromagnetic fields (RFI)	10 V/m
EN 61000-4-4 Fast transients (burst)	1 kV
EN 61000-4-6 Cond. disturbances (HF fields)	10 V eff.
EN 61000-4-8 Magnetic fields	3 A/m
EN 55011 Noise radiation	Class B

FS = Full scale: Signal span according to electrical measuring range


### Connection Assignment

Signal	Cable code 2_ _	Connector code 5_ _	Cable code 2_ _	Connector code 5_ _
	Single-channel	Single-channel	Partly redundant	Partly redundant
Supply voltage $U_b$	GN	Pin 1	GN	Pin 1
GND	BN	Pin 3	BN	Pin 3
Signal output 1	WH	Pin 2	WH	Pin 2
Signal output 2	-	-	YE	Pin 4
Do not connect / not assigned	YE	Pin 4	-	-
Connect cable shielding to GND				




## Technical Data Output Characteristics


Output characteristic

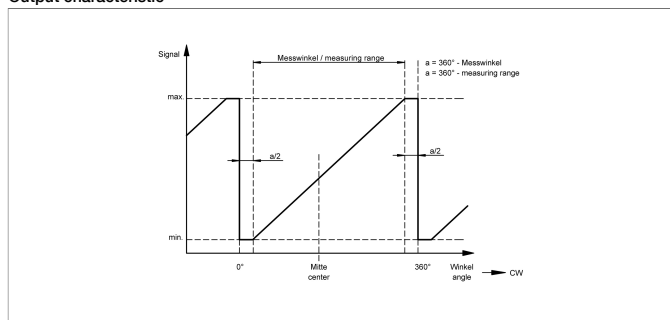


Output characteristic

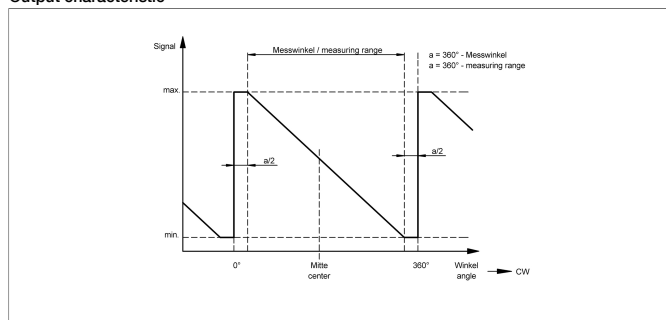


Output characteristic

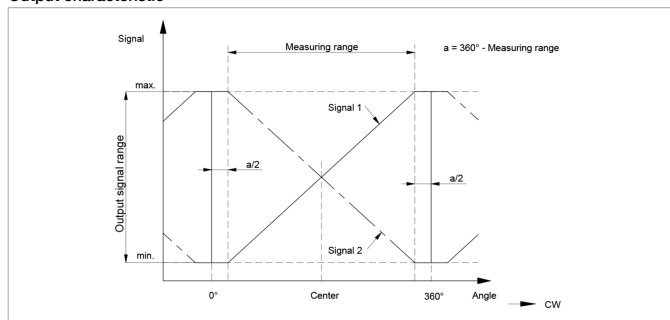


Output characteristic

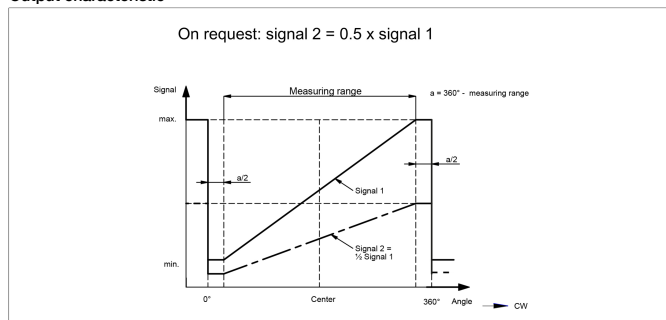


Output characteristic

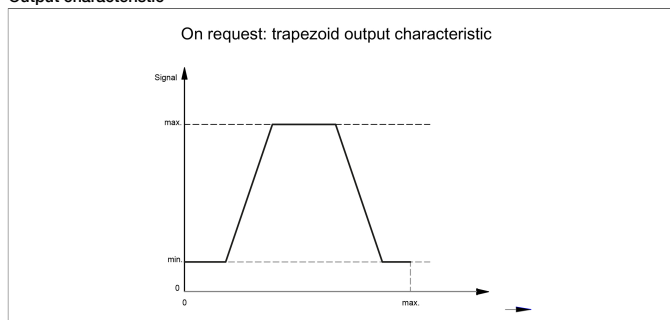


Output characteristic

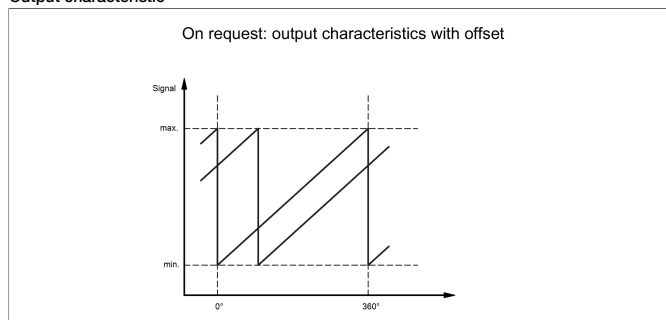

Output characteristic

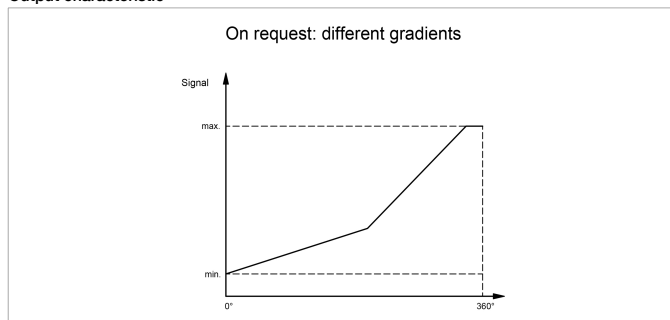



Output characteristic

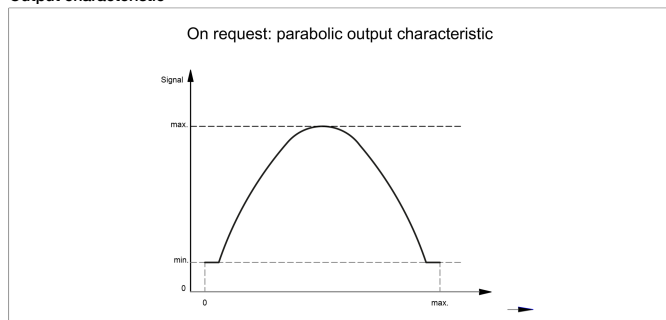



Connector System

M12



3

4

2

1

1 = BN

2 = WH

3 = BU

4 = BK

IP67

UL

EEM-33-32/62/97

M12x1 Mating female connector, 4-pin, straight, A-coded, with molded cable, shielded, IP67, open ended

Plug housingPA

Cable sheathPUR, Ø = max. 6 mm, -25 ... +80°C (moved) -50 ... +80°C (fixed)

Lead wiresPP, 0.34 mm²

P/N	Type	Length
400005600	EEM-33-32	2 m
400005609	EEM-33-62	5 m
400005650	EEM-33-97	10 m

IP67

Protection class IP67 DIN EN 60529

IP68

Protection class IP68 DIN EN 60529

Very good Electromagnetic Compatibility (EMC) and shield systems

Very good resistance to oils, coolants and lubricants


Suited for applications in dragchains

UL

UL - approved

CAN-Bus

## Signal Processing

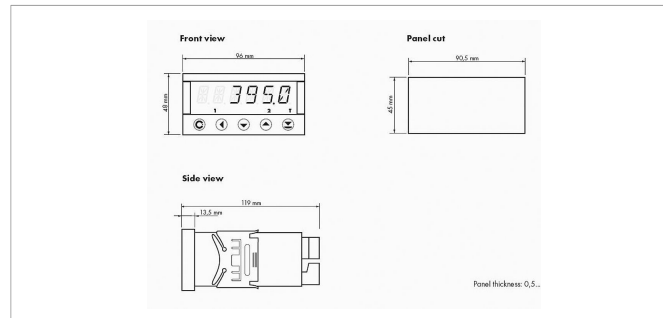

### MAP-4000

Multifunctional measuring device with digital display for direct connection of potentiometric and normalized signals.

- Supply voltage 10...30 VDC, 80...250 VDC or AC
- High accuracy up to 0.1%
- Adjustable supply voltage for sensors 5...24 V
- Temperature coefficient 100 ppm/K
- Optional RS 232, RS 485, analog output, limited switch
- Complete data see separate data sheet




## Connecting Options on request



### M12 connector

- Customized lengths
- 3-, 4-, 6- and 8-pole versions
- Protection class IP68
- Ordering codes of standard versions see ordering specifications



### Molex Mini Fit jr.

- Customized length and lead wires
- 3-, 4- and 6-pole versions
- On request



### Tyco AMP Super Seal

- Pin- and bushing housing
- Customized lengths
- 3-, 4- and 6-pole versions
- Protection class IP67
- On request



### Molex Mini Fit jr.

- Customized length and lead wires
- 3-, 4- and 6-pole versions
- On request



### Deutsch DTM 04

- Pin- and bushing housing
- Customized lengths
- 3-, 4- and 6-pole versions
- Protection class IP67
- On request



### ITT Cannon Sure Seal connector

- Customized lengths
- 3-, 4- and 6-pole versions
- Protection class IP67
- On request

Novotechnik U.S., Inc.  
155 Northboro Road

Southborough, MA 01772  
Phone 508 485 2244  
Fax 508 485 2430  
[info@novotechnik.com](mailto:info@novotechnik.com)  
[www.novotechnik.com](http://www.novotechnik.com)



© Oct 11, 2024